

		QTY
A	PLASTIC CAP	8
B	SCREW	8
001	ALLEN WRENCH FOR SCREWS (B)	1

PREVENTATIVE MAINTENANCE AND WARNING
 USE THIS PRODUCT ONLY FOR SEATING ONE PERSON AT A TIME
 DO NOT USE CHAIR AS STEP STOOL/LADDER
 DO NOT USE CHAIR UNLESS ALL BOLTS, SCREWS ARE TIGHT
 CHECK AND RETIGHTEN ALL BOLTS, SCREWS EVERY 6 MONTHS

ANY QUESTIONS PLEASE CONTACT
 CHAIRWORKS AMERICA
 755 RACK DRIVE, SUITE A
 LAWRENCEVILLE, GA 30046
 1-888-217-2577


OPERATING INSTRUCTIONS

A. SEAT HEIGHT ADJUSTMENT

- TO RAISE THE SEAT:
 - LEAN SLIGHTLY FORWARD WHILE SEATED-TO RELIEVE THE PRESSURE ON THE TILT MECHANISM.
 - REACH UNDER THE RIGHT SIDE OF THE CHAIR AND LOCATE THE HANDLE AND RAISE YOURSELF UP SLIGHTLY TO ALLOW THE CHAIR TO REACH YOUR DESIRED HEIGHT.
- TO LOWER THE SEAT:
 - REMAIN SEATED AND LIFT THE HANDLE UPWARDS UNTIL THE CHAIR LOWERS TO YOUR DESIRED HEIGHT.

B. TO OPERATE TILT LOCKOUT:

TILT "LOCKOUT" LOCKS THE CHAIR IN THE UPRIGHT POSITION ONLY. PULLING HANDLE ALL THE WAY OUT, ALLOWS THE CHAIR TO TILT. PUSHING THE HANDLE "IN", LOCKS IN THE FULLY UPRIGHT POSITION.

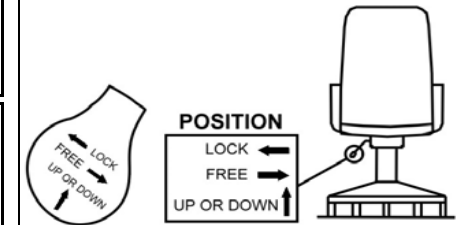

C. TILT TENSION ADJUSTMENT:

GRASP THE ROUND CYLINDER KNOB UNDER THE FRONT CENTER SEAT.
 ■ FOR FIRMER/STIFFER-TURN CLOCKWISE.
 ■ FOR SOFTER/LOOSER-TURN COUNTER CLOCKWISE.